

NOTE:

VALVE AND VALVE BOXES TO BE SET ON 4" 2A MODIFIED AND BACKFILL AT LEAST 4" ABOVE TOP OF WATER MAIN


CURB BOX (COMPLETE) W/ ENLARGED BASE

ALL THREAD TIE ROD: ON BOTH SIDES OF RISER

C.I. PLUG (M.J.) TO MATCH MAIN SIZE & TYPE OF JOINT USED

MAIN SIZE VARIABLE

M.J. PIPE, D.I.

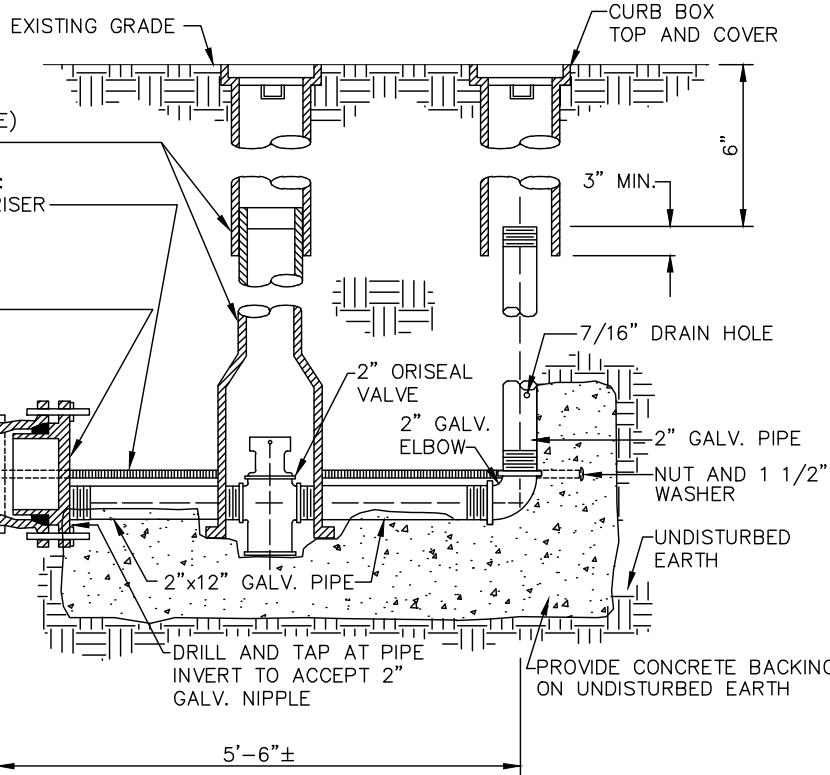

PROVIDE SOCKET CLAMP (ITT GRINNEL FIG. 595 OR EQUAL) AND EXTEND ALL-THREAD TIE RODS INTO CONCRETE BACKING. ALTERNATIVE TO SOCKET CLAMP, PROVIDE ONE ALL-THREAD TIE ROD THROUGH LUG HOLES ON BOTH SIDES OF RISER.

STANDARD BLOW-OFF DETAIL

NOT TO SCALE

REVISED 7/4/12

STANDARD BLOW-OFF

PREPARED FOR:

PERKASIE REGIONAL AUTHORITY



306 NORTH FIFTH STREET, PERKASIE, PA
(215) 257-5711

DSN BY: P.C.A.

CHK BY: P.C.A.

DATE: 4/08/96

DWG NO. PRA-W02